



C.I.P.	Cal. 9 C.F. Mori Country of Origin: IT	TAB.	VII
		Date	04-09-27
		Revision	06-09-19

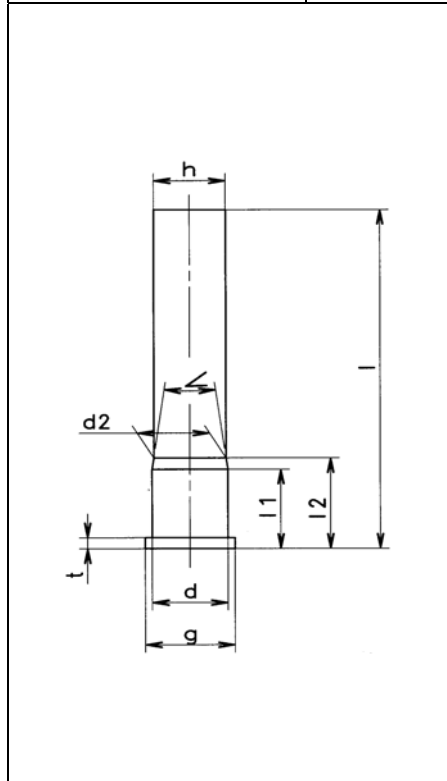

CARTRIDGE MAXIMALE

Dimens. Value Toler.

- d¹⁾ = 8.80 - 0.10
- g = 10.45 - 0.30
- t¹⁾ = 1.45 - 0.20
- d2 = 8.40
- h = 8.35 - 0.35
- l1 = 10.50
- l2 = 12.00
- α = 15°11'24"
- l = 45.00 - 2.50

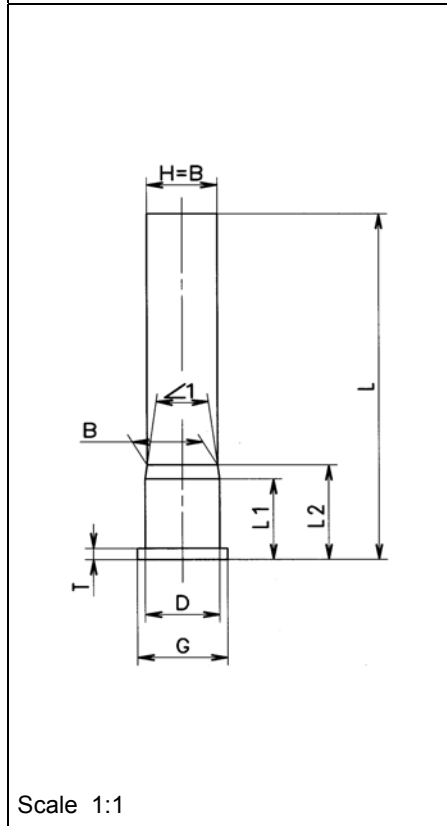

CHAMBER MINIMALE

Dimens. Value Toler.

- D¹⁾ = 8.85 + 0.10
- G = 10.70 + 0.20
- T¹⁾ = 1.45 + 0.10
- D1 = 8.80
- B¹⁾ = 8.38 + 0.50
- H¹⁾ = 8.38 + 0.10
- α1¹⁾ = 13°18' max
- l1 = 10.50
- l2 = 12.30
- L = 45.10 + 2.00

Pressure transducer

Pmax	PK	PE	M
830	950	1040	9.00

Headspace

- Fe = 0.10
 - Fe¹⁾ = 0.20
 - Fe¹⁾ = 0.35
- Proof Barrel
with bascule
automatic

Scale 1:1

Dimensions in « mm »
Dimensions et tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons