



C.I.P.	Cal. 8	TAB. VII
		Date 89-01-19
		Revision 06-09-19

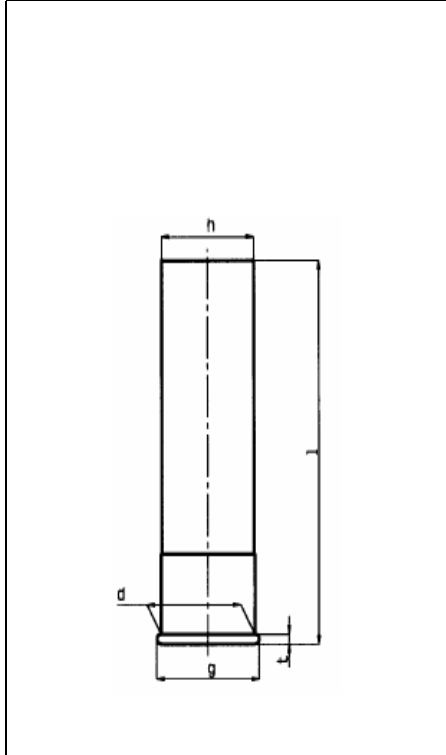

CARTRIDGE MAXIMALE

Dimens. Value Toler.

d ¹⁾	= 23.50	- 0.25	
g	= 26.25	- 0.45	
t ¹⁾	= 2.90	- 0.40	Marking
h	= 23.15	- 0.45	
l	= 82.40	- 2.50	8/82
l	= 100.00	- 2.50	8/100

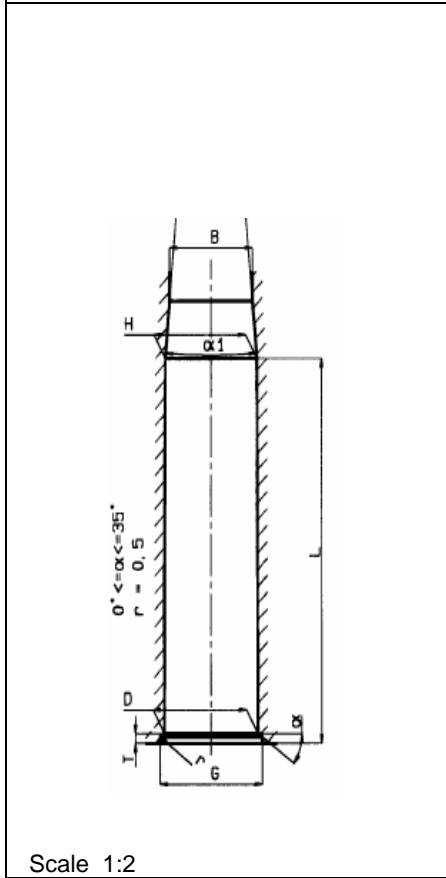

CHAMBER MINIMALE

Dimens. Value Toler.

D ¹⁾	= 23.65	+ 0.10				
G	= 26.30	+ 0.10				
T ¹⁾	= 2.95	+ 0.10				
H ¹⁾	= 23.20	+ 0.10	Marking	Pressure transducer		
B ¹⁾	= 20.80	+ 0.70		Pmax	PK	PE
α1 ¹⁾	= 10°30'	max		bar		M
L ¹⁾	= 82.60	+ 2.00	8/82	1050	1200	1320
L ¹⁾	= 100.50	+ 2.00	8/100	1050	1200	1320

Headspace

Fe	= 0.10	Proof Barrel
Fe ¹⁾	= 0.20	with bascule
Fe ²⁾	= 0.35	automatic

Scale 1:2

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons