



C.I.P.	Cal. 10	TAB.	VII
		Date	84-06-14
		Revision	06-09-19

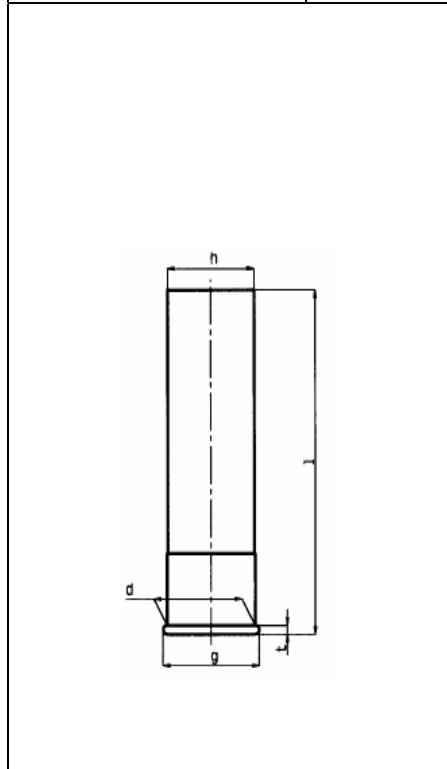

CARTRIDGE MAXIMALE

Dimens. Value Toler.

d ¹⁾	= 21.70	- 0.24	
g	= 23.65	- 0.64	
t ¹⁾	= 1.90	- 0.40	Marking
h	= 21.30	- 0.47	
l	= 76.00	- 2.50	10/76
l	= 82.40	- 2.50	10/82
l	= 88.70	- 2.50	10/89

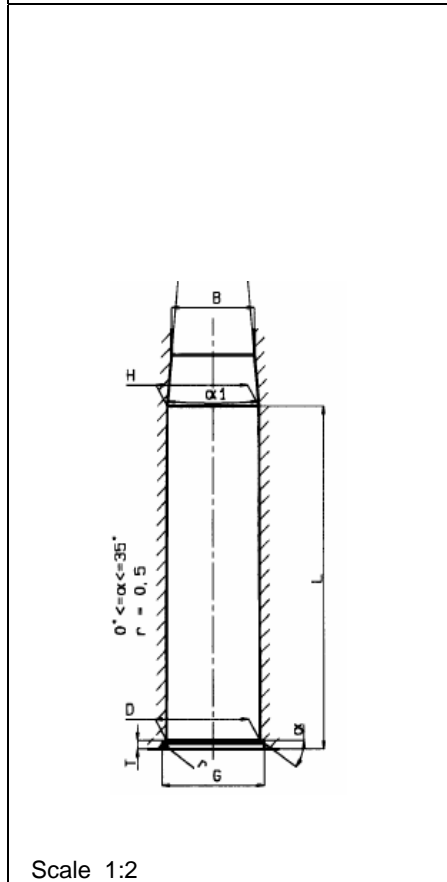

CHAMBER MINIMALE

Dimens. Value Toler.

D ¹⁾	= 21.75	+ 0.10	
G	= 23.75	+ 0.10	
T ¹⁾	= 1.90	+ 0.10	
H ¹⁾	= 21.40	+ 0.10	Marking
B ¹⁾	= 19.30	+ 0.70	
alpha1 ¹⁾	= 10°30'	max	
L ¹⁾	= 76.20	+ 2.00	10/76
L ¹⁾	= 82.60	+ 2.00	10/82
L ¹⁾	= 88.90	+ 2.00	10/89

Pressure transducer

Pmax	PK	PE	M
	bar		
1050	1200	1320	25/30
1050	1200	1320	25/30
1050	1200	1320	25/30

Headspace

Fe	= 0.10	Proof Barrel
Fe ¹⁾	= 0.20	with bascule
Fe ¹⁾	= 0.35	automatic

Scale 1:2

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Note : 1) Check for safety reasons