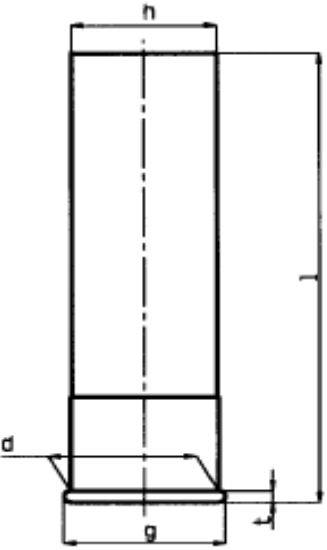
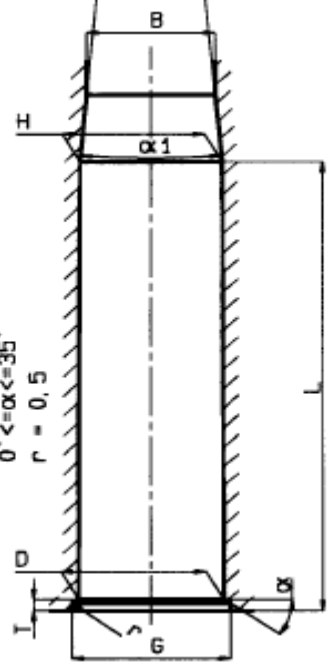


C.I.P.	Cal. 12	TAB.	VII			
		Date	84-06-14			
		Revision	09-05-05			
	<p>CARTRIDGE MAXIMALE</p> <p>Dimens. Value Toler.</p> <p>d¹⁾ = 20.60 - 0.28 g = 22.45 - 0.48 t¹⁾ = 1.85 - 0.30 Marking h = 20.20 - 0.47 l = 35.00 - 2.50 12/35 T l = 50.00 - 2.50 12/50 SAPL l = 60.00 - 2.50 12/60 l = 65.00 - 2.50 12/65 l = 67.50 - 2.50 12/67 l = 69.80 - 2.50 12/70 l = 72.80 - 2.50 12/73 l = 76.00 - 2.50 12/76 l = 88.70 - 2.50 12/89</p>					
	 <p>0° <= alpha <= 35° r = 0,5</p>	<p>CHAMBER MINIMALE</p> <p>Dimens. Value Toler.</p> <p>D¹⁾ = 20.65 + 0.10 G = 22.55 + 0.10 T¹⁾ = 1.85 + 0.10 H¹⁾ = 20.30 + 0.10 Marking Pressure transducer B¹⁾ = 18.20 + 0.70 Pmax PK PE M alpha¹⁾ = 10°30' max bar L¹⁾ = 35.00 + 2.00 12/35 T 150 173 188 25 L¹⁾ = 50.10 + 2.00 12/50 SAPL 90 104 113 25/30 L¹⁾ = 60.10 + 2.00 12/60 740 850 930 25/30 L¹⁾ = 65.10 + 2.00 12/65 740 850 930 25/30 L¹⁾ = 67.60 + 2.00 12/67 740 850 930 25/30 L¹⁾ = 69.90 + 2.00 12/70 740 850 930 25/30 L¹⁾ = 73.00 + 2.00 12/73 1050 1200 1320 25/30 L¹⁾ = 76.20 + 2.00 12/76 1050 1200 1320 25/30 L¹⁾ = 88.90 + 2.00 12/89 1050 1200 1320 25/30</p> <p>Headspace</p> <p>Fe = 0.10 Proof Barrel Fe¹⁾ = 0.20 with bascule Fe¹⁾ = 0.35 automatic</p>				
<p>Scale 1:1</p>		<p>Notes: 1) Check for safety reasons</p>				
<p>Dimensions in « mm » Dimensions and tolerances for Proof Barrels : See Appendix CR 4.</p>						