



C.I.P.	Cal. 14	TAB.	VII
		Date	84-06-14
		Revision	06-09-19

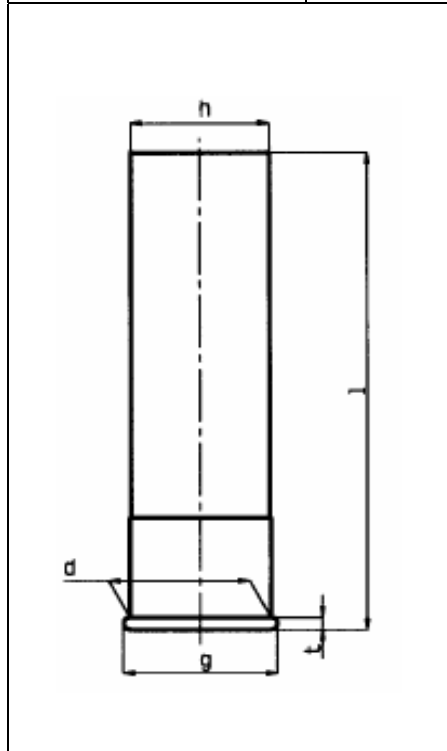

CARTDRIGE MAXIMALE

Dimens. Value Toler.

d ¹⁾	= 19.65	- 0.25	
g	= 21.45	- 0.45	
t ¹⁾	= 1.75	- 0.35	Marking
h	= 19.30	- 0.50	
l	= 65.00	- 2.50	14/65
l	= 67.50	- 2.50	14/67
l	= 69.80	- 2.50	14/70

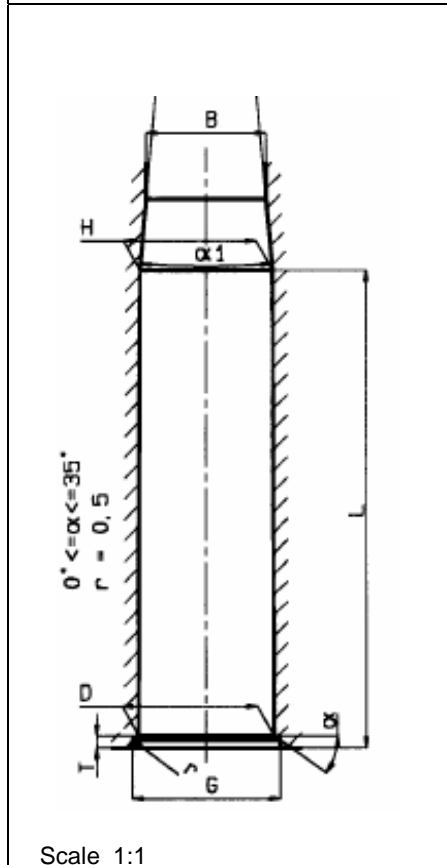

CHAMBER MINIMALE

Dimens. Value Toler.

D ¹⁾	= 19.70	+ 0.10					
G	= 21.55	+ 0.10					
T ¹⁾	= 1.75	+ 0.10					
H ¹⁾	= 19.35	+ 0.10	Marking	Pressure transducer			
B ¹⁾	= 17.20	+ 0.50		Pmax	PK	PE	M
alpha 1 ¹⁾	= 10°30'	max		bar			
L ¹⁾	= 65.10	+ 2.00	14/65	740	850	930	25/30
L ¹⁾	= 67.60	+ 2.00	14/67	740	850	930	25/30
L ¹⁾	= 69.90	+ 2.00	14/70	740	850	930	25/30

Headspace

Fe	= 0.10	Proof Barrel with bascule automatic
Fe ¹⁾	= 0.20	
Fe ¹⁾	= 0.35	

Scale 1:1

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels :
See Appendix CR 4.

Notes : 1) Check for safety reasons