



C.I.P.	Cal. 16	TAB.	VII
		Date	84-06-14
		Revision	10-05-26

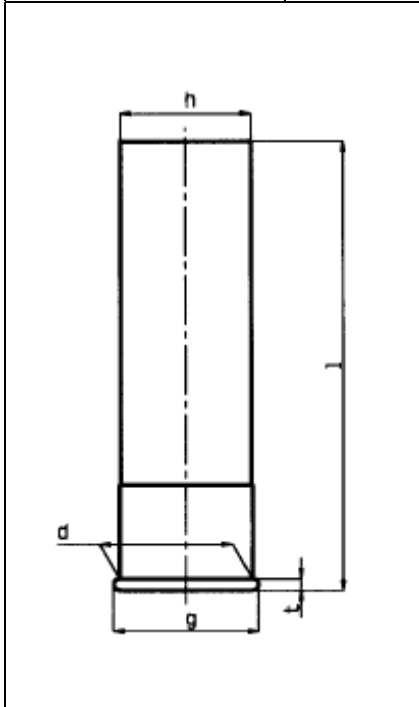

CARTRIDGE MAXIMALE

Dimens.	Value	Toler.	
d ¹⁾	= 18.90	- 0.23	
g	= 20.65	- 0.33	
t ¹⁾	= 1.65	- 0.35	Marking
h	= 18.55	- 0.49	
l	= 65.00	- 2.50	16/65
l	= 67.50	- 2.50	16/67
l	= 69.80	- 2.50	16/70
l	= 76.00	- 2.50	16/76

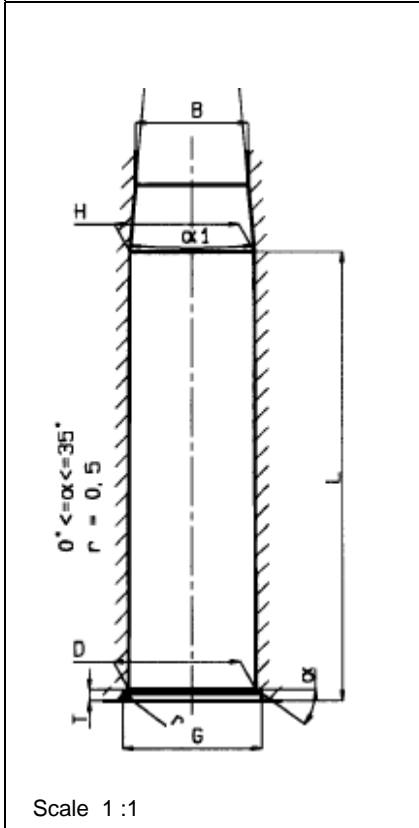

CHAMBER MINIMALE

Dimens.	Value	Toler.					
D ¹⁾	= 18.95	+ 0.10					
G	= 20.75	+ 0.10					
T ¹⁾	= 1.65	+ 0.10					
H ¹⁾	= 18.60	+ 0.10	Marking	Pressure transducer			
B ¹⁾	= 16.80	+ 0.50		Pmax	PK	PE	M
α ¹⁾	= 10°30'	max					
L ¹⁾	= 65.10	+ 2.00	16/65	780	900	980	25/30
L ¹⁾	= 67.60	+ 2.00	16/67	780	900	980	25/30
L ¹⁾	= 69.90	+ 2.00	16/70	780	900	980	25/30
L ¹⁾	= 76.20	+ 2.00	16/76	1050	1200	1320	25/30

Headspace

Fe	= 0.10	Proof Barrel
Fe ¹⁾	= 0.20	with bascule
Fe ¹⁾	= 0.35	automatic

Scale 1 :1

Dimensions in « mm » Dimensions and tolerances for Proof Barrels : See Appendix CR 4.	Notes : 1) Check for safety reasons
---	-------------------------------------