



C.I.P.	Cal. 24	TAB.	VII
		Date	84-06-14
		Revision	06-09-19

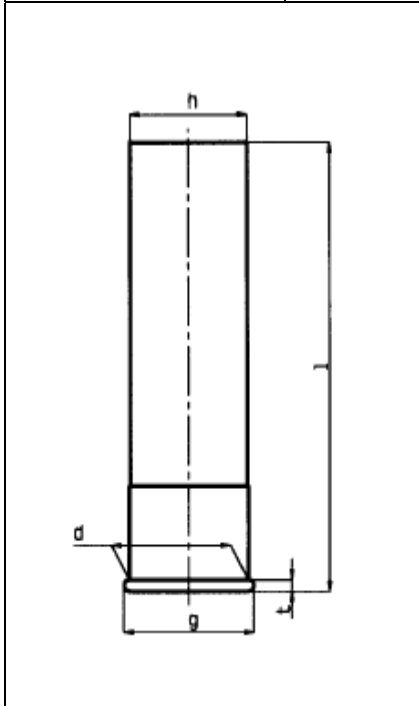

CARTRIDGE MAXIMALE

Dimens.	Value	Toler.	
d ¹⁾	= 16.75	- 0.20	
g	= 18.45	- 0.40	
t ¹⁾	= 1.55	- 0.35	Marking
h	= 16.45	- 0.50	
l	= 63.50	- 2.50	24/63,5
l	= 65.00	- 2.50	24/65
l	= 69.80	- 2.50	24/70

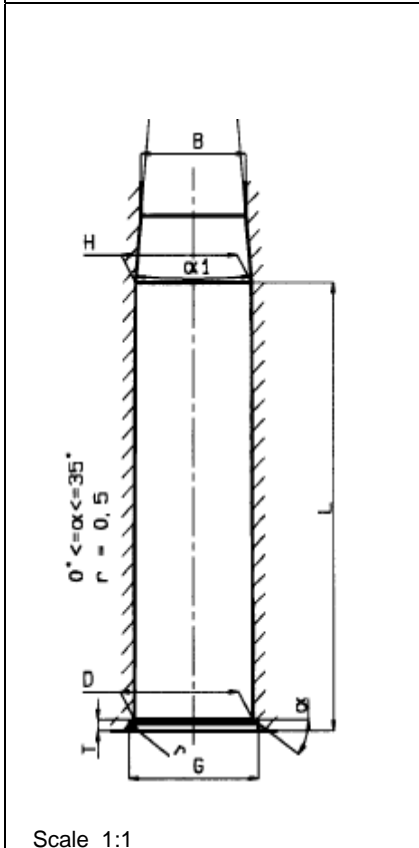

CHAMBER MINIMALE

Dimens.	Value	Toler.					
D ¹⁾	= 16.80	+ 0.10					
G	= 18.55	+ 0.10					
T ¹⁾	= 1.55	+ 0.10					
H ¹⁾	= 16.50	+ 0.10	Marking	Pressure transducer			
B ¹⁾	= 14.70	+ 0.50		Pmax	PK	PE	M
alpha ¹⁾	= 10°30'	max		bar			
L ¹⁾	= 63.60	+ 2.00	24/63,5	830	950	1040	25/30
L ¹⁾	= 65.10	+ 2.00	24/65	830	950	1040	25/30
L ¹⁾	= 69.90	+ 2.00	24/70	830	950	1040	25/30

Headspace

Fe	= 0.10	Proof Barrel with bascule automatic
Fe ¹⁾	= 0.20	
Fe ¹⁾	= 0.35	

Scale 1:1

Dimensions in « mm »
Dimensions and tolerances for Proof Barrels:
See Appendix CR 4.

Notes : 1) Check for safety reasons