


| | | | |
|---------------|----------------------|-----------------|-----------------|
| C.I.P. | Cal. 12 Blanc | TAB. | VIII |
| | | Date | 91-12-01 |
| | | Revision | 18-10-17 |

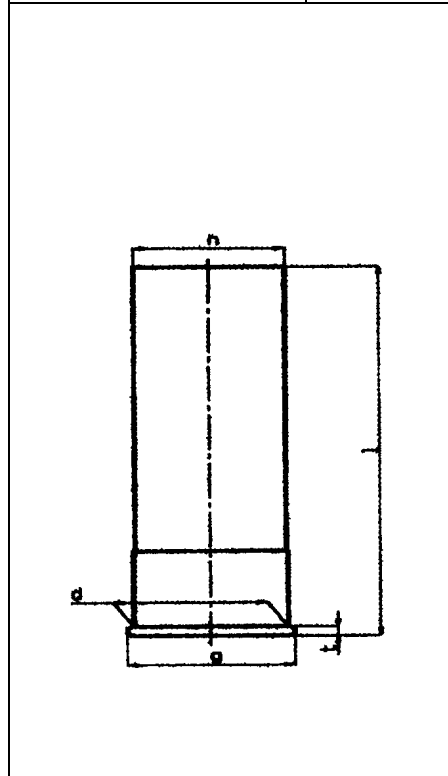

CARTRIDGE MAXIMALE


Dimens. Value Toler.

- d¹⁾ = 20.60 - 0.28
- g = 22.45 - 0.48
- t¹⁾ = 1.85 - 0.35
- h = 20.20 - 0.47
- l = 32.00 - 2.50
- l' = 49.00 - 2.50

Marking

- 12/32 SAPL Blanc
- 12/45 Blanc

l: Total length of the ammunition before loading

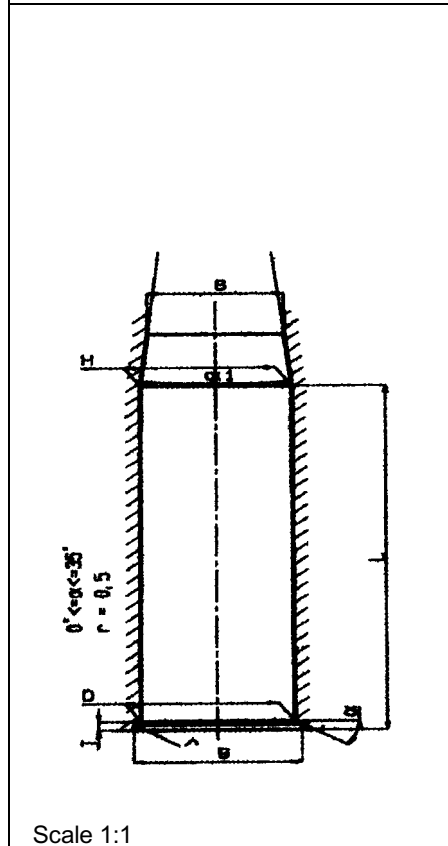

CHAMBER MINIMALE

Dimens. Value Toler.

- D¹⁾ = 20.65 + 0.10
- G = 22.55 + 0.10
- T¹⁾ = 1.85 + 0.10
- H¹⁾ = 20.30 + 0.10
- B¹⁾ = 18.80 + 0.70

Marking

Pressure transducer
Pmax PK PE M
bar

- alpha¹⁾ = 90° max
- L¹⁾ = 32,50 + 2.00 12/32 SAPL Blanc 150 173 195 15
- L¹⁾ = 45.00 + 2.00 12/45 Blanc 150 173 195 15

Headspace

- Fe = 0.10 Proof barrel
- Fe¹⁾ = 0.20 with bascule
- Fe¹⁾ = 0.35 automatic

Scale 1:1

Dimensions en « mm »
Dimensions and tolerances for Proof Barrels :
See Appendix CR 4.

Notes : 1) Check for safety reasons