


<b>C.I.P.</b>	<b>44/83</b>	<b>TAB.</b>	<b>X</b>
		<b>Date</b>	<b>94-03-01</b>
		<b>Revision</b>	<b>18-10-17</b>


Country of Origin: FR

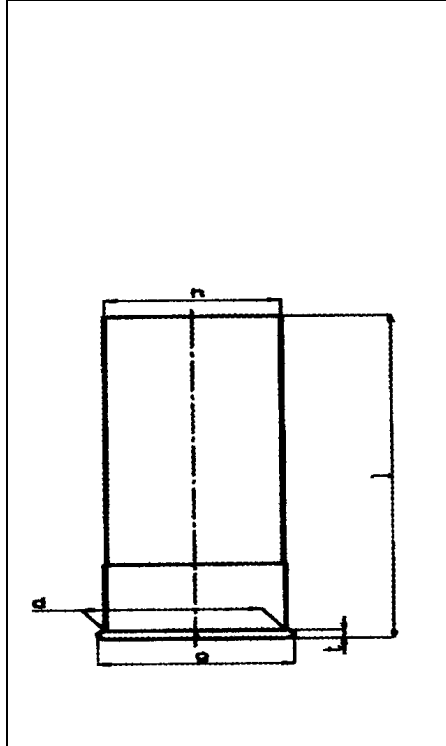

**CARTIDGE MAXIMALE**

Dimens. Vale Toler.

- d<sup>1)</sup> = 47.60 - 0.45
- g = 51.30 - 0.50
- t<sup>1)</sup> = 2.20 - 0.10
- h = 47.60 - 0.45
- l = 83.50 - 1,00

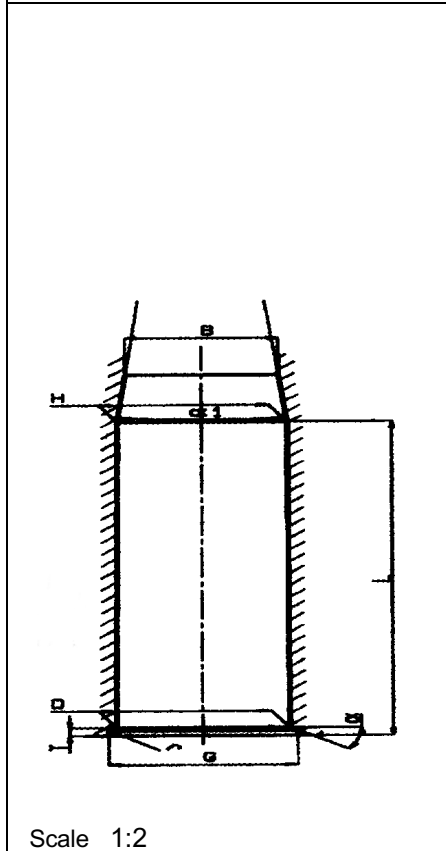

**CHAMBER MINIMALE**

Dimens. Value Toler.

- D<sup>1)</sup> = 47.90 + 0.50
- G = 51.50 + 1.00
- T<sup>1)</sup> = 2.10 + 0.10
- H<sup>1)</sup> = 47.80 + 0.30
- B<sup>1)</sup> = 44.20 + 0.40
- α<sup>1)</sup> = 22°04' max
- L<sup>1)</sup> = 83.50 + 0.50

	Energy	
	Emax	EK EE
	Joule	
	135	144 150

Headspace

- Fe = /
- Fe<sup>1)</sup> = /
- Fe<sup>1)</sup> = /

Proof Barrel  
with bascule  
automatic

Scale 1:2

Dimensions in « mm »  
Dimensions and tolerances for Proof Barrels :  
See Appendix CR 4

Notes : 1) Check for safety reasons