



C.I.P.	44/83 SP Country of origin : FR	TAB.	X
		Date	00-03-02
		Revision	18-10-17

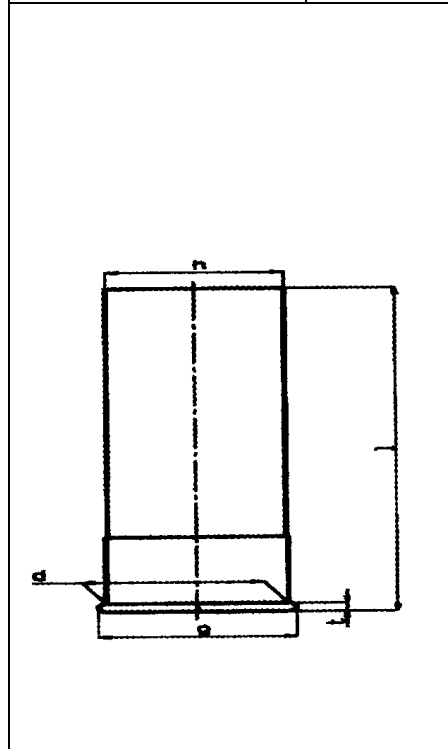

CARTIDGE MAXIMALE

Dimens. Vale Toler.

- d¹⁾ = 48,00 - 0.70
- g = 51.35 - 0.45
- t¹⁾ = 2.10 - 0.40
- h = 47.60 - 0.45
- l = 83.50 - 2.50

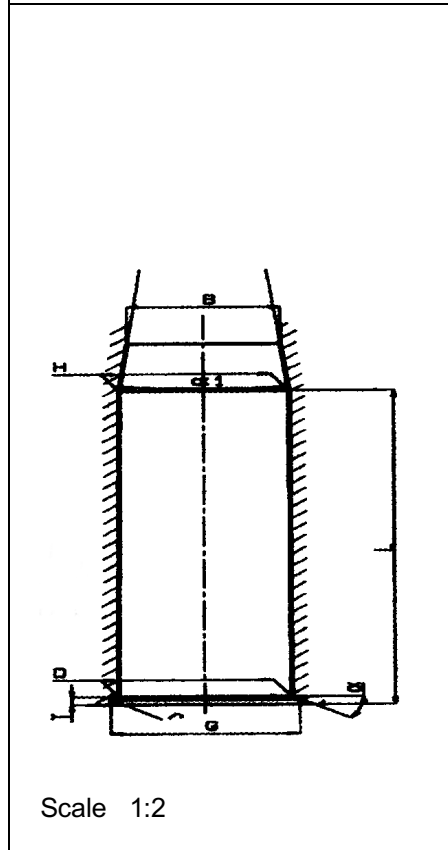

CHAMBER MINIMALE

Dimens. Value Toler.

- D¹⁾ = 48.00 + 0.10
- G = 51.40 + 0.45
- T¹⁾ = 2.25 + 0.10
- H¹⁾ = 47.70 + 0.15
- B¹⁾ = 44.20 + 0.70
- α¹⁾ = 30° max
- L¹⁾ = 83.50 + 2.00

	Energy	
E _{max}	E _K	E _E
	Joule	
200	214	220

Headspace

- Fe = /
- Fe¹⁾ = /
- Fe¹⁾ = /

Proof Barrel
with bascule
automatic

Scale 1:2

Dimensions in « mm » Dimensions and tolerances for Proof Barrels : See Appendix CR 4	Notes : 1) Check for safety reasons
--	-------------------------------------