



C.I.P.	MR 35 Punch Kal. 12-28,5 Ursprungsland: CZ	TAB.	X
		Datum	96-03-19
		Revision	98-06-09

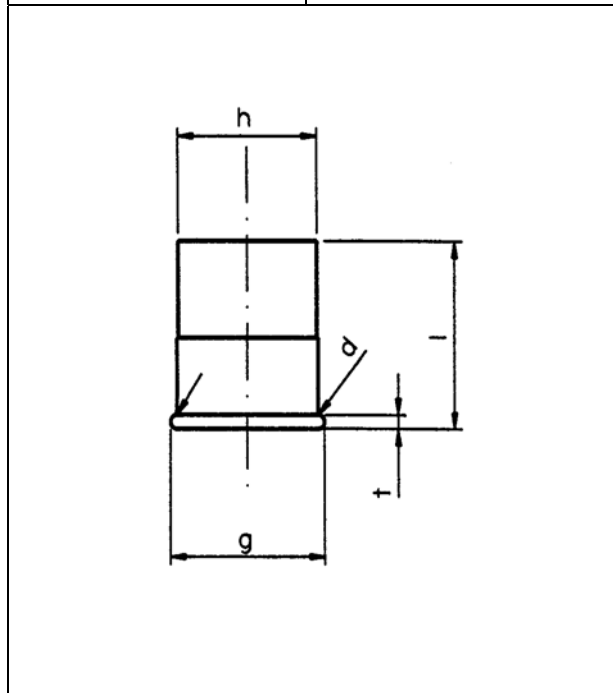

### PATRONE MAXIMUM

Dimens. Wert Toler.

d <sup>1)</sup>	=	20.60	- 0.15
g	=	22.45	- 0.25
t <sup>1)</sup>	=	1.88	- 0.25
h	=	20.20	- 0.25
l	=	25.00	- 2.50

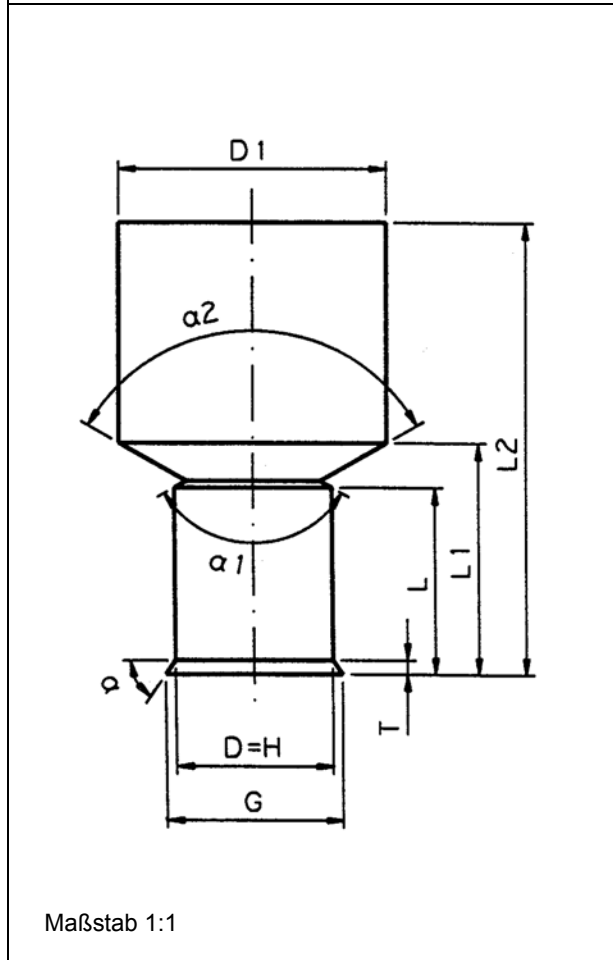

### PATRONENLAGER MINIMUM

Dimens. Wert Toler.

D <sup>1)</sup> = H	=	20.20	H9
G <sup>1)</sup>	=	23.07	
T <sup>1)</sup>	=	1.85	+ 0.10
D1 <sup>1)</sup>	=	35.00	H11
B <sup>1)</sup>	=	44.20	+ 0.70
alpha <sup>1)</sup>	=	55°	
alpha1 <sup>1)</sup> = alpha2	=	120°	
L <sup>1)</sup>	=	25.00	± 0.10
L1 <sup>1)</sup>	=	31.00	± 0.10
L2 <sup>1)</sup>	=	60.20	- 0.10

Energie

E <sub>max</sub>	EK	EE
	Joule	
150	160	165

Maßstab 1:1

Dimensionen in « mm »  
Dimensionen und Toleranzen für Messläufe:

Bemerkung : 1) Kontrolle aus Sicherheitsgründen