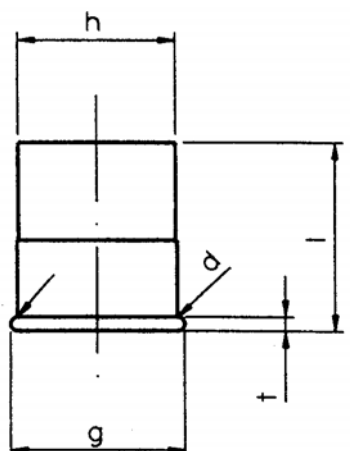
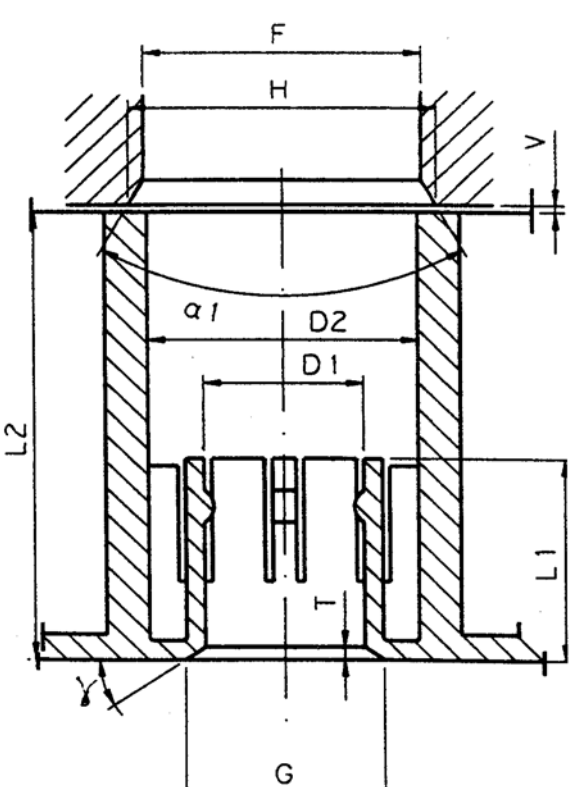


C.I.P.	MR 35 Punch Kal. 12-35 Ursprungsland : FR	TAB.	X									
		Datum	96-02-21									
		Revision	98-06-09									
		<p>PATRONE MAXIMUM</p> <p>Dimens. Wert Toler.</p> <p>$d^{1)}$ = 20.60 - 0.28</p> <p>g = 22.45 - 0.48</p> <p>$t^{1)}$ = 1.85 - 0.35</p> <p>h = 20.20 - 0.47</p> <p>l = 25.00 - 2.50</p>										
		<p>PATRONENLAGER MINIMUM</p> <p>Dimens. Wert Toler.</p> <p>$D1^{1)}$ = 20.60</p> <p>$L1^{1)}$ = 27.00</p> <p>$G\ mini^{1)}$ = 25.80</p> <p>$T\ mini^{1)}$ = 1.70</p> <p>$B^{1)}$ = 33°10'42"</p> <p>$D2\ mini^{1)}$ = 35.00</p> <p>$L2^{1)}$ = 60.05 - 0.30</p> <p>$V^{1)}$ = 0.95 - 0.70</p> <p>$H^{1)}$ =</p> <p>$F\ mini^{1)}$ = 36.00</p> <p>$\alpha 1^{1)}$ = 60°</p> <p>Energie</p> <table border="1"> <tr> <td>Emax</td> <td>EK</td> <td>EE</td> </tr> <tr> <td colspan="3">Joule</td> </tr> <tr> <td>115</td> <td>125</td> <td>130</td> </tr> </table>		Emax	EK	EE	Joule			115	125	130
Emax	EK	EE										
Joule												
115	125	130										
<p>Maßstab 1:1</p>		<p>Bemerkung: 1) Kontrolle aus Sicherheitsgründen</p>										
<p>Dimensionen in « mm » Dimensionen und Toleranzen für Messläufe:</p>												