



<b>C.I.P.</b>	<b>12 mm x 39</b> Country of Origin: FR	<b>TAB. X</b>
		<b>Date 98-01-27</b>
		<b>Revision 98-06-09</b>

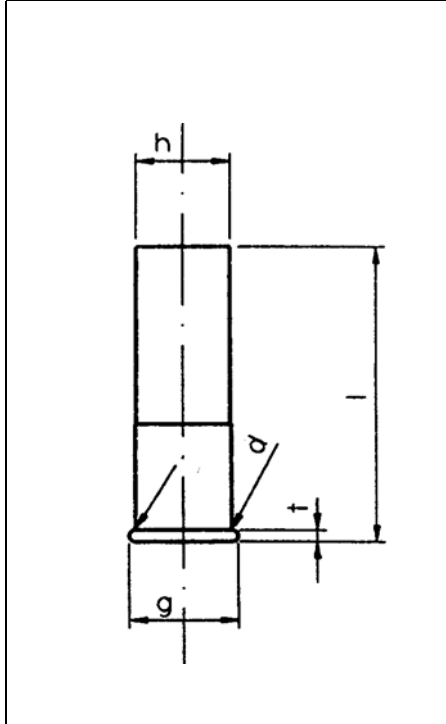

**CARTRIDGE MAXIMALE**

Dimens. Value Toler.

- d<sup>1)</sup> = 12.00 - 0.11
- g = 13.60 - 0.40
- t<sup>1)</sup> = 1.55 - 0.35
- h = 11.75 - 0.38
- l = 39.00 - 2.50

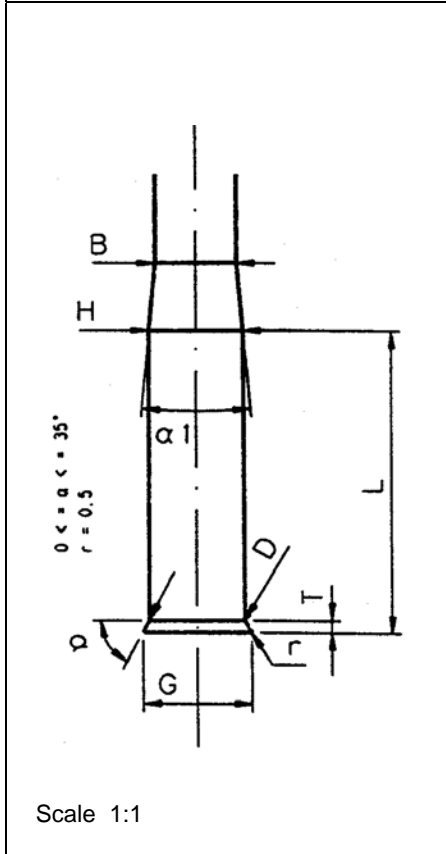

**CHAMBER MINIMALE**

Dimens. Value Toler.

- D<sup>1)</sup> = 12.05 + 0.10
- G<sup>1)</sup> = 13.70 + 0.10
- T<sup>1)</sup> = 1.55 + 0.10
- H<sup>1)</sup> = 11.80 + 0.10
- B<sup>1)</sup> = 10.20 + 0.50
- α1<sup>1)</sup> = 10°30' max
- L<sup>1)</sup> = 39.00 + 2.00

	Energy		
	Emax	EK	EE
		Joule	
	100	107	110

Headspace

- Fe = 0.10
- Fe<sup>1)</sup> = 0.20
- Fe<sup>1)</sup> = 0.35

Proof Barrel  
with bascule  
automatic

Scale 1:1

Dimensions in « mm » Dimensions and tolerances for Proof Barrels: See Appendix CR 4.	Notes : 1) Check for safety reasons
--	-------------------------------------